



ProSafe Auxiliary Power Supply APS135W

The ProSafe Auxiliary Power Supply APS135W provides a replaceable power supply for the GSM73xxSv2 series gigabit switches. You can make use of an RPS (Redundant Power Supply) while replacing the power supply. Refer to the switch *Hardware Installation Guide* for additional information. When an RPS is used, the power supply can be replaced without stopping the switch or requiring a reboot.

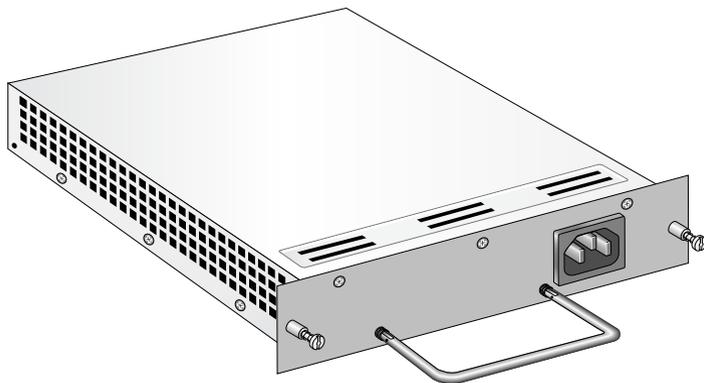

Replacing an APS135W Power Supply

Note: The power module has a “hot swap” capability. It is not necessary to remove the AC power cord from the power supply module when removing the power supply module.

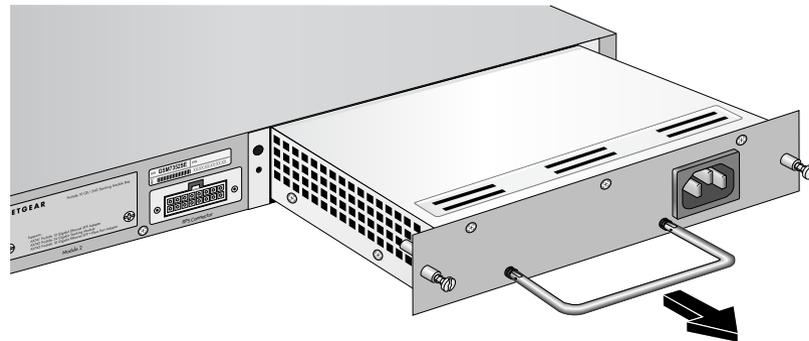

Removing an APS135W Power Supply

To remove the APS135W power module, follow these steps:

1. Loosen the two captive screws on the power module.
2. Remove the power module from the power module slot by pulling on the extraction handle.

Installing an APS135W Power Supply

To install an APS135W power module, follow these steps:

Warning: When inserting a power module into the switches, do not use unnecessary force. Doing so can damage the connectors on the rear of the supply and on the midplane.

1. Insert the new power supply module into the power module slot, and gently push the module into the slot.
2. Align the two captive screws with the screw holes in the switch’s back panel.
3. Using a screwdriver, gently tighten the captive screws.
4. If not connected, insert the AC power cord into the power module and connect the power cord to an AC outlet.

Specifications

Specifications	
Dimensions (HxWxD)	8.40" x 7.64" x 1.66" (216mm x 194mm x 42.4 mm)
Weight	2.87 lb (1.3kg)
Operating Temperature	32 to 122 °F (0 to 50 °C)
Storage Temperature	-49 to 185 °F (-45 to 85 °C)
Operative relative humidity	10 to 90% and non condensing
MTBF	2,237,887 Hours (~255 years) @ 25 °C

Technical Support

Thank you for selecting NETGEAR products.

After installing your device, locate the serial number on the label of your product and use it to register your product at <http://www.NETGEAR.com/register>. Registration is required before you can use our telephone support service. Registration via our web site is strongly recommended.

Go to <http://kbserver.netgear.com> for product updates and Web support. For Warranty and Regional Customer Support information, see the *Warranty Card* that came with your product.



This symbol was placed in accordance with the European Union Directive 2002/96 on the Waste Electrical and Electronic Equipment (the WEEE Directive). If disposed of within the European Union, this product should be treated and recycled in accordance with the laws of your jurisdiction implementing the WEEE Directive.

© 2009 by NETGEAR, Inc. All rights reserved. NETGEAR and the NETGEAR logo are registered trademarks of NETGEAR, Inc. in the United States and/or other countries. Other brand and product names are trademarks or registered trademarks of their respective holders. Information is subject to change without notice.

July 2009



201-11712-01



July 2009